


359.00 EUR  
incl. 19% VAT, plus [shipping](#)

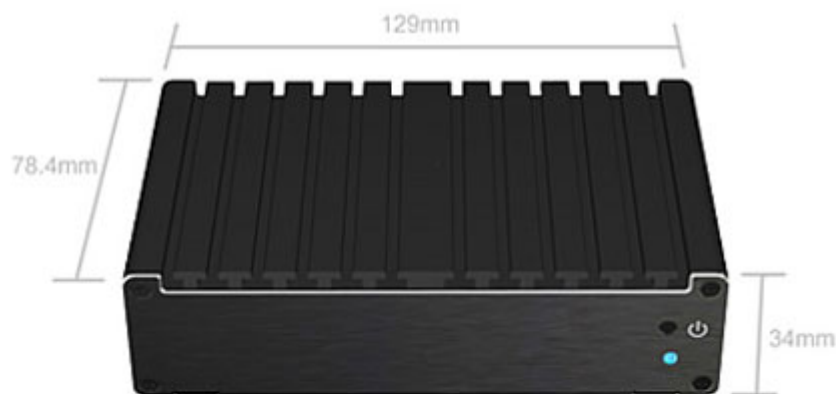

- INTEL® Bay Trail-M N2930, N2807 SoC Processor
- Embedded Long-life Series, Planned Lifecycle through Q1'2019
- Pico-ITX Form Factor Fanless Systems
- 12V DC jack on back panel for external power supply
- HDMI output, Full-size mSATA support
- ECO-design for EuP/ErP

|                 |                                          |                                                |
|-----------------|------------------------------------------|------------------------------------------------|
| <b>Model No</b> | <b>JBC400P93-2930   JBC400P93-2807</b>   | <b>JBC400P93W-2930   JBC400P93W-2807</b>       |
| <b>Part No</b>  | <b>HBJC400P93-2930   HBJC400P93-2807</b> | <b>HBJC400P93W-2930  <br/>HBJC400P93W-2807</b> |

#### Motherboard Specification

|               |                                                                                                                                                                    |
|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CPU</b>    | Fanless INTEL® Bay Trail-M Celeron N2930 SoC Processor 1.83GHz, Quad-Core, 7.5W<br>Fanless INTEL® Bay Trail-M Celeron N2807 SoC Processor 1.58GHz, Dual-Core, 4.3W |
| <b>Memory</b> | Onboard 2GB DDR3L-1333, non-expandable                                                                                                                             |
| <b>VGA</b>    | Intel® HD Graphics                                                                                                                                                 |
| <b>LAN</b>    | 1 x Realtek 8111G PCI-E Gigabit Ethernet                                                                                                                           |
| <b>Audio</b>  | Intel® HDMI Audio                                                                                                                                                  |

|                                  |                                                                                                                                                                                                        |                                       |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|
| <b>Storage</b>                   | 1 x full size mSATA Slot                                                                                                                                                                               |                                       |
| <b>Wireless / Mini-PCIE Slot</b> | 1 x half size Mini-PCI Express Slot                                                                                                                                                                    | Wireless 802.11 b/g/n + Bluetooth 4.0 |
| <b>Board Form Factor</b>         | Pico ITX Form Factor (100mm X 72mm)                                                                                                                                                                    |                                       |
| <b>Chassis Specification</b>     |                                                                                                                                                                                                        |                                       |
| <b>Product size</b>              | 129 * 78.4 * 34 mm                                                                                                                                                                                     |                                       |
| <b>Material</b>                  | Lightweight aluminum alloy with extruded aluminum IO panel                                                                                                                                             |                                       |
| <b>Color</b>                     | Black and Silver                                                                                                                                                                                       |                                       |
| <b>HDD</b>                       | NA                                                                                                                                                                                                     |                                       |
| <b>Front I/O Port</b>            | 1 * Power Button<br>1 * Power LED                                                                                                                                                                      |                                       |
| <b>Rear I/O Port</b>             | 1 * USB 3.0 port<br>1 * USB 2.0 port<br>1 * HDMI<br>1 * RJ-45 port<br>1 * 12V DC-in jack<br>2 * SMA Connector for WiFi Antenna<br>1 * Kensington Lock Hole                                             |                                       |
| <b>Power</b>                     | Adapter : AC_90~240V / DC_12V_3A/36W                                                                                                                                                                   |                                       |
| <b>Environment</b>               | Operating Temperature : 0°C ~ 40°C with air flow<br>Storage Temperature : -20°C ~ 80°C                                                                                                                 |                                       |
| <b>Standard Accessory</b>        | √ 36W AC Adapter x1<br>√ Power Cord x1<br>√ Screw pack x1<br>√ DVD Disk x1<br>√ Manual x1<br>√ Wall / VESA / Din Rail Mount Bracket<br>√ Din Rail Clip<br>√ WIFI antenna (with HBJC400P93W-2930 model) |                                       |
| <b>Functional</b>                | Digital Signage, Set Top Box, Thin Client, Car Entertainment, Smart Mini PC, POS/POI, KIOSK, HTPC                                                                                                      |                                       |
| <b>Certificate</b>               | CE,FCC,ErP For Barebone<br>CE,FCC,TUV,UL,CCC,CB,ErP For Power Adapter                                                                                                                                  |                                       |